



REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	SDR		2/25/97	M16984
B	(6A) ADDED VIEW C-C	AGJ		10-7-99	33309
C	(4A) NOTE 2 WAS MOUNTING TYPE: C	AGJ		5-13-02	41044

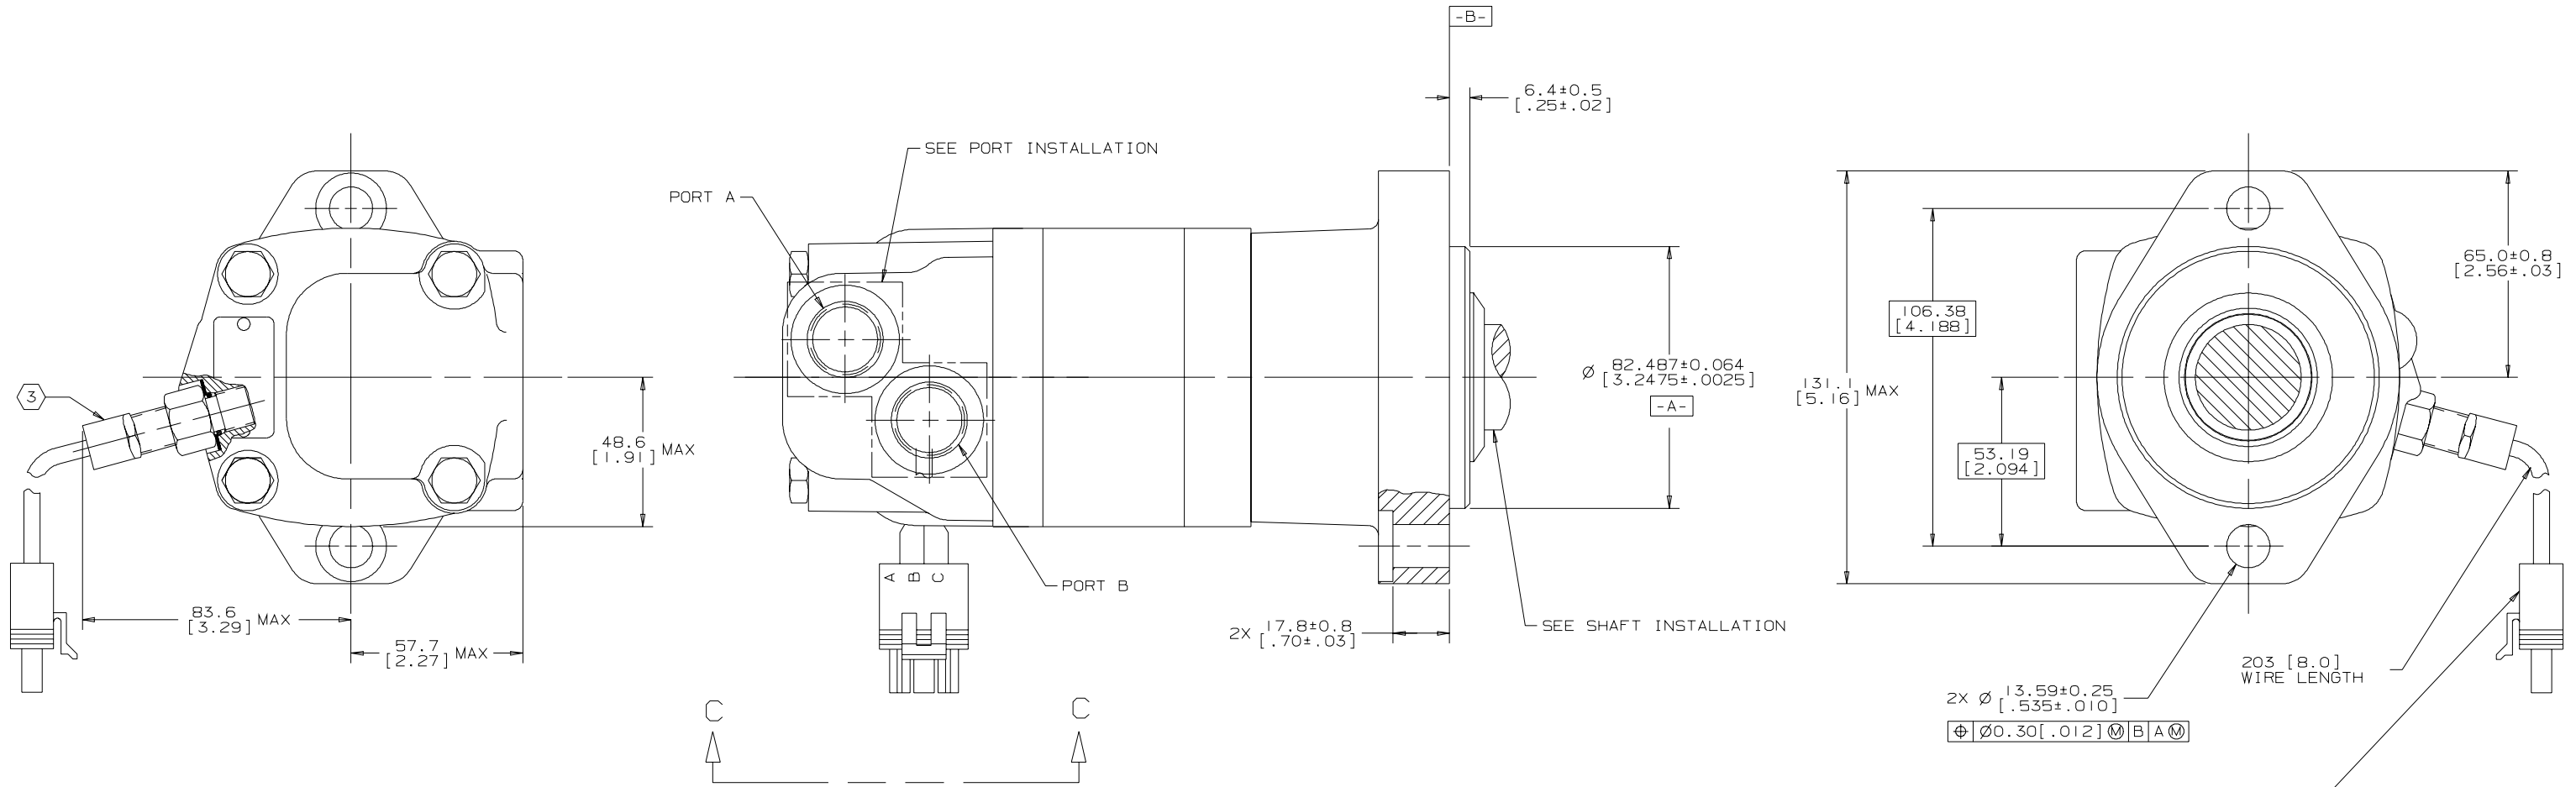

SLEEVE TERMINALS DESIGNED TO MATE WITH WEATHER PACK CONNECTOR P/N 12010717 TERMINAL P/N 12089188 CONTACT RATINGS: 5 AMPS MAX AT 12 VOLTS (A=POWER, B=COMMON, C=SIGNAL)

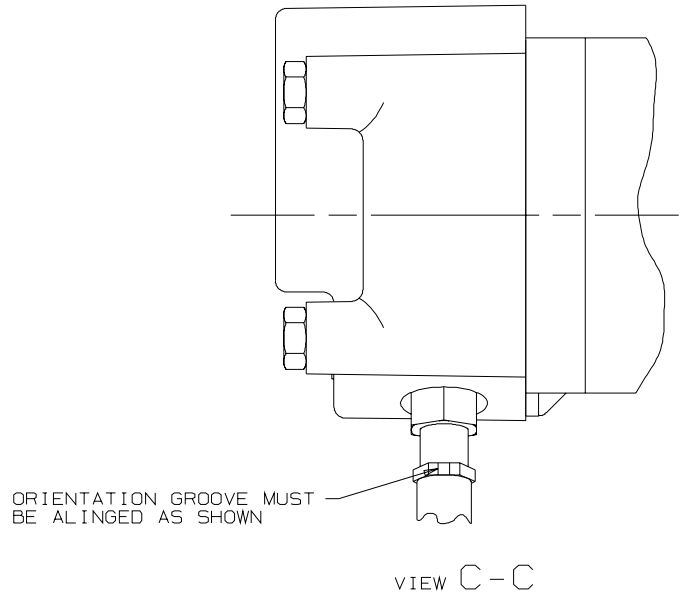

- NOTE
- 1 ROTATION:
STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE: CLOCKWISE WHEN PORT "A" IS PRESSURIZED COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED
REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE: COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED CLOCKWISE WHEN PORT "A" IS PRESSURIZED
 - 2 MOUNTING TYPE: AC
STANDARD: 2 BOLT: Ø 82.6 [3.25] PILOT Ø 13.59 [.535] HOLES ON Ø 106.4 [4.19] BOLT CIRCLE "SAE A"
 - 3 NOMINAL SENSOR OUTPUT WILL BE 30 ELECTRICAL PULSES PER SHAFT REVOLUTION
SUPPLY VOLTAGE: 8 TO 28 Vdc
OUTPUT VOLTAGE: LOW .5 Vdc AT 10 mA; HIGH Vs-1 Vdc

G S K

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN		DRAWING BASED ON ANSI Y14.5M-1982	
INCHES <input type="checkbox"/>	MILLIMETERS <input checked="" type="checkbox"/>	THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMBINATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN (PER ISO 1019)	
TOLERANCES		MATERIAL/HEAT TREAT	
.X	----	DRAWN BY/DATE SDR 3/3/97	
.XX	----	CHECKED BY/DATE RAF 3-17-97	
.XXX	----	ENGRG BY/DATE VJD 3-18-97	TITLE
<	----	METALLURGY BY/DATE	2000 SERIES MOTOR INSTALL
UNSPECIFIED RADI	ARE		
UNSPECIFIED DRAFT ANGLES	ARE		
DRAWING FORMAT	CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	THIRD ANGLE PROJECTION	WIDRINCHES (MICROMETERS) <input type="checkbox"/> NUMBER
		DO NOT SCALE	ARITHMETICAL AVERAGE
			SCALE 1/1 SHEET 1 OF 1

Danfoss

A-665-023