
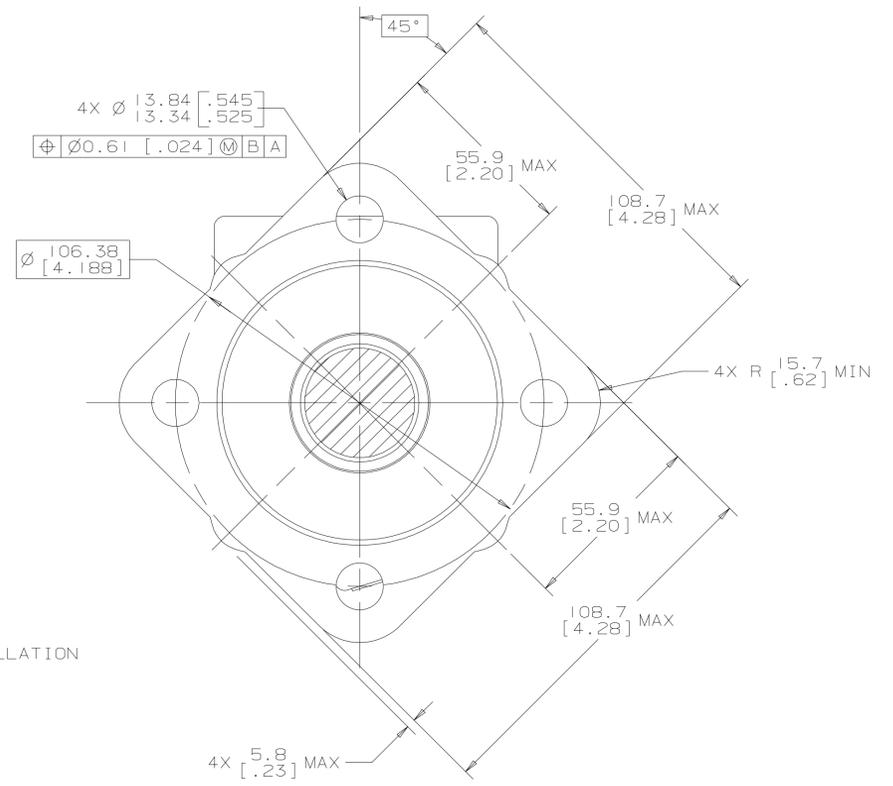
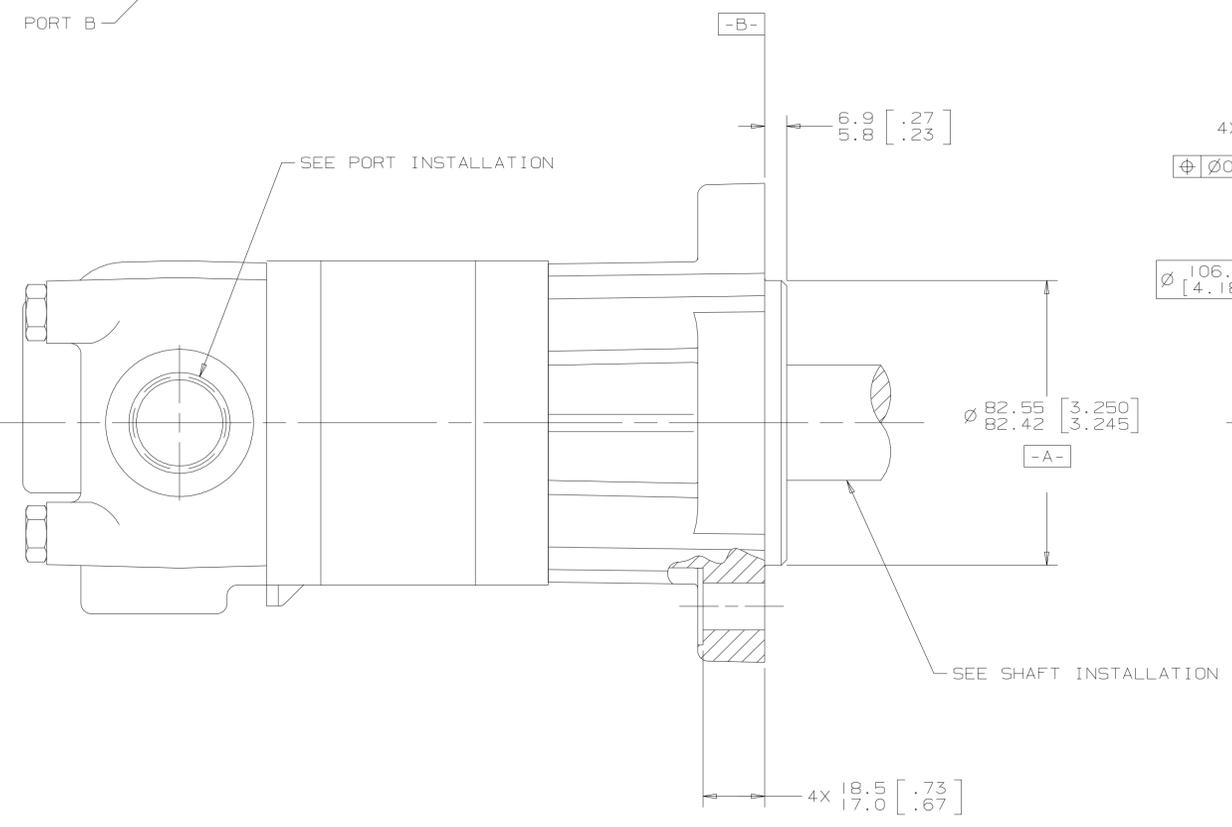
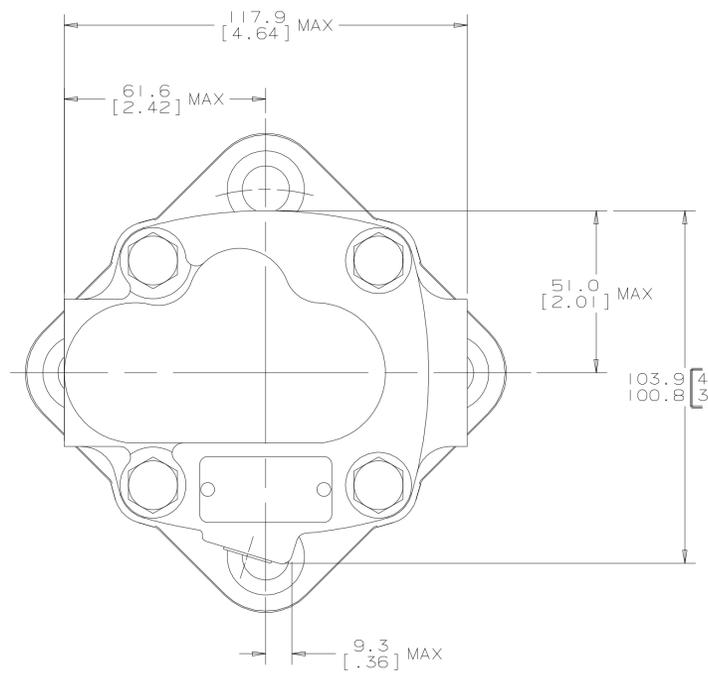


SYM	REVISION	BY	DATE	ECN
A	ENGINEERING RELEASE	AGJ	5-26-93	22833
B	REVISED	MJZ	6-12-96	27921
C	(4A)NOTE 2 WAS MOUNTING TYPE: H	AGJ	5/13/02	41044
D	(3C)4X Ø 13.84/13.34 [.545/.525] WAS 4X Ø 13.72/13.46 [.540/.530]	AGJ	9-30-03	45504
E	REVISED	AAB	2-19-10	M78432

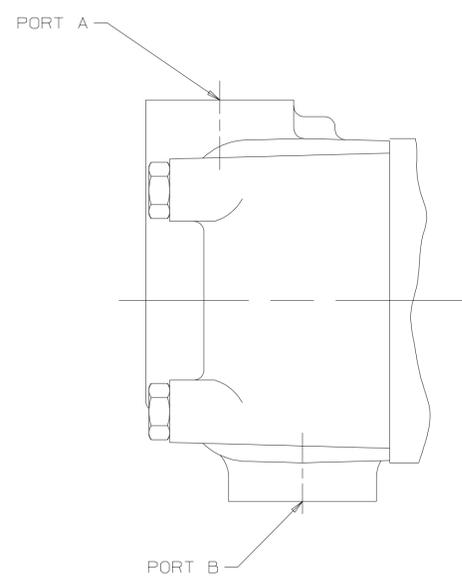

NOTE

1 ROTATION:
 STANDARD: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
 CLOCKWISE WHEN PORT "A" IS PRESSURIZED
 COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED

REVERSE: WHEN FACING SHAFT END OF MOTOR, SHAFT TO ROTATE;
 CLOCKWISE WHEN PORT "B" IS PRESSURIZED
 COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED

2 MOUNTING TYPE: AH
 STANDARD, 4 BOLT: Ø 82.6 [3.25] PILOT
 Ø 13.59 [.535] HOLES ON Ø 106.4 [4.19] BOLT CIRCLE

REVIEWED FOR CLASSIFICATION PER ESP -042

DRAWING BASED ON ANSI Y14.5M-1982

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES MILLIMETERS

TOLERANCES

.XX ± REF

.XXX ± ONLY

UNSPECIFIED RADI ARE

UNSPECIFIED DRAFT ANGLES ARE

C SIZE

DO NOT SCALE

THIRD ANGLE PROJECTION

ARITHMETICAL AVERAGE

SCALE 1/1

SHEET 1 OF 1

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)

DRN: A. JOHNSON
 BY/DATE: 6-8-93

CHECKED: SDR
 BY/DATE: 6-24-93

ENGR: SZ
 BY/DATE: 6-28-93

MATERIAL/HEAT TREAT

TITLE: 2000 SERIES MOTOR INSTALL

NUMBER: A-669-003

LOGO: Danfoss