
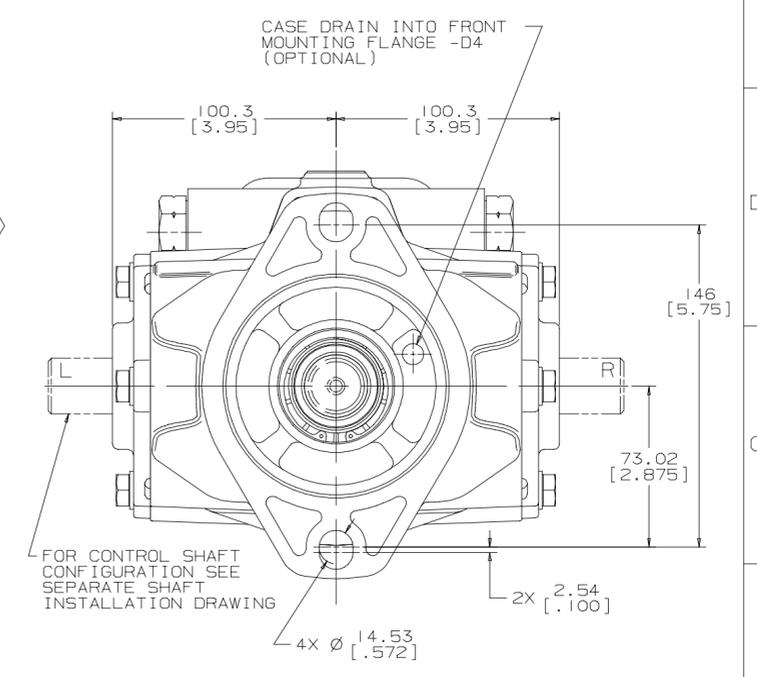
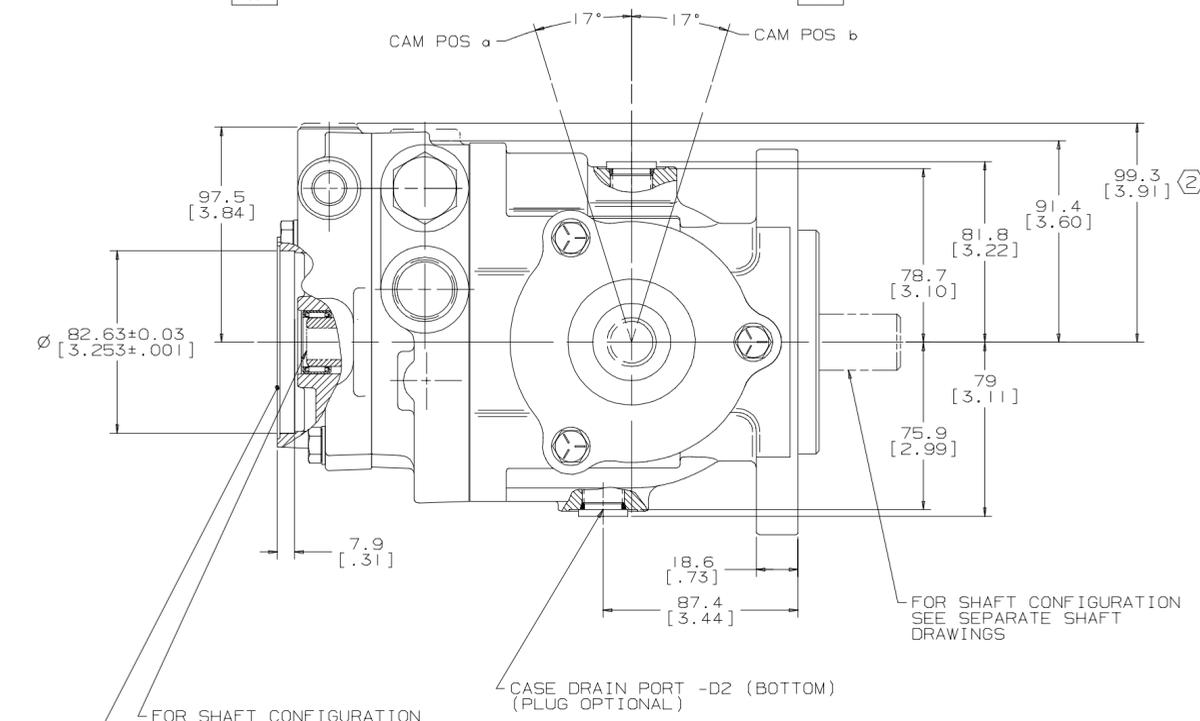
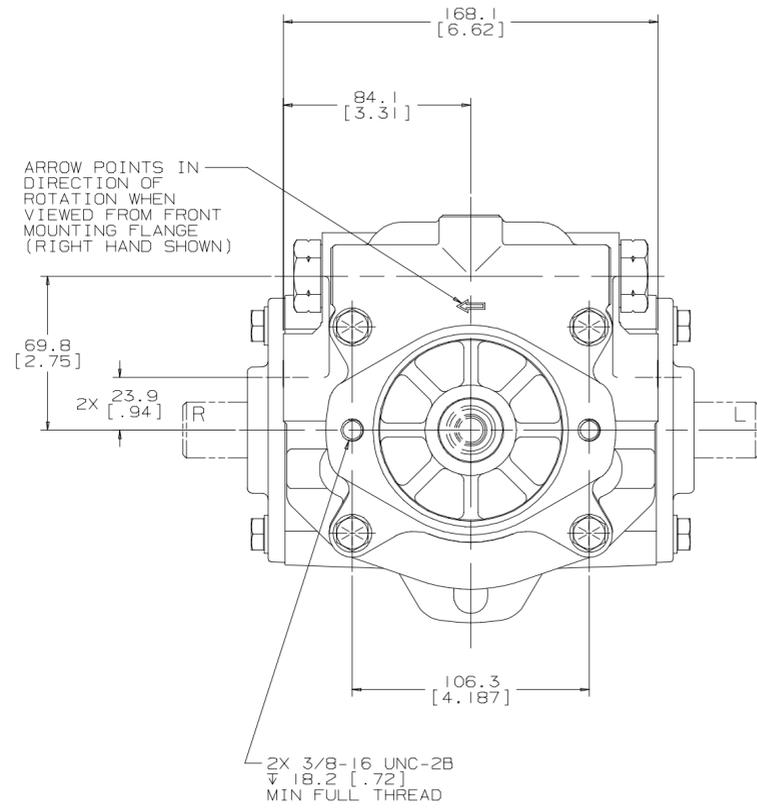


NOTE
 1 UNIT MUST BE INSTALLED IN SUCH A POSITION THAT THE CASE DRAIN ASSURES AN OIL LEVEL AT OR ABOVE UNIT CENTERLINE. OIL LEVEL MUST BE AT CENTER LINE OR ABOVE BEFORE STARTING
 2 DIMENSION WHEN PORT IS NOT PRESENT

REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	JMS	CEW	1-19-95	M12977

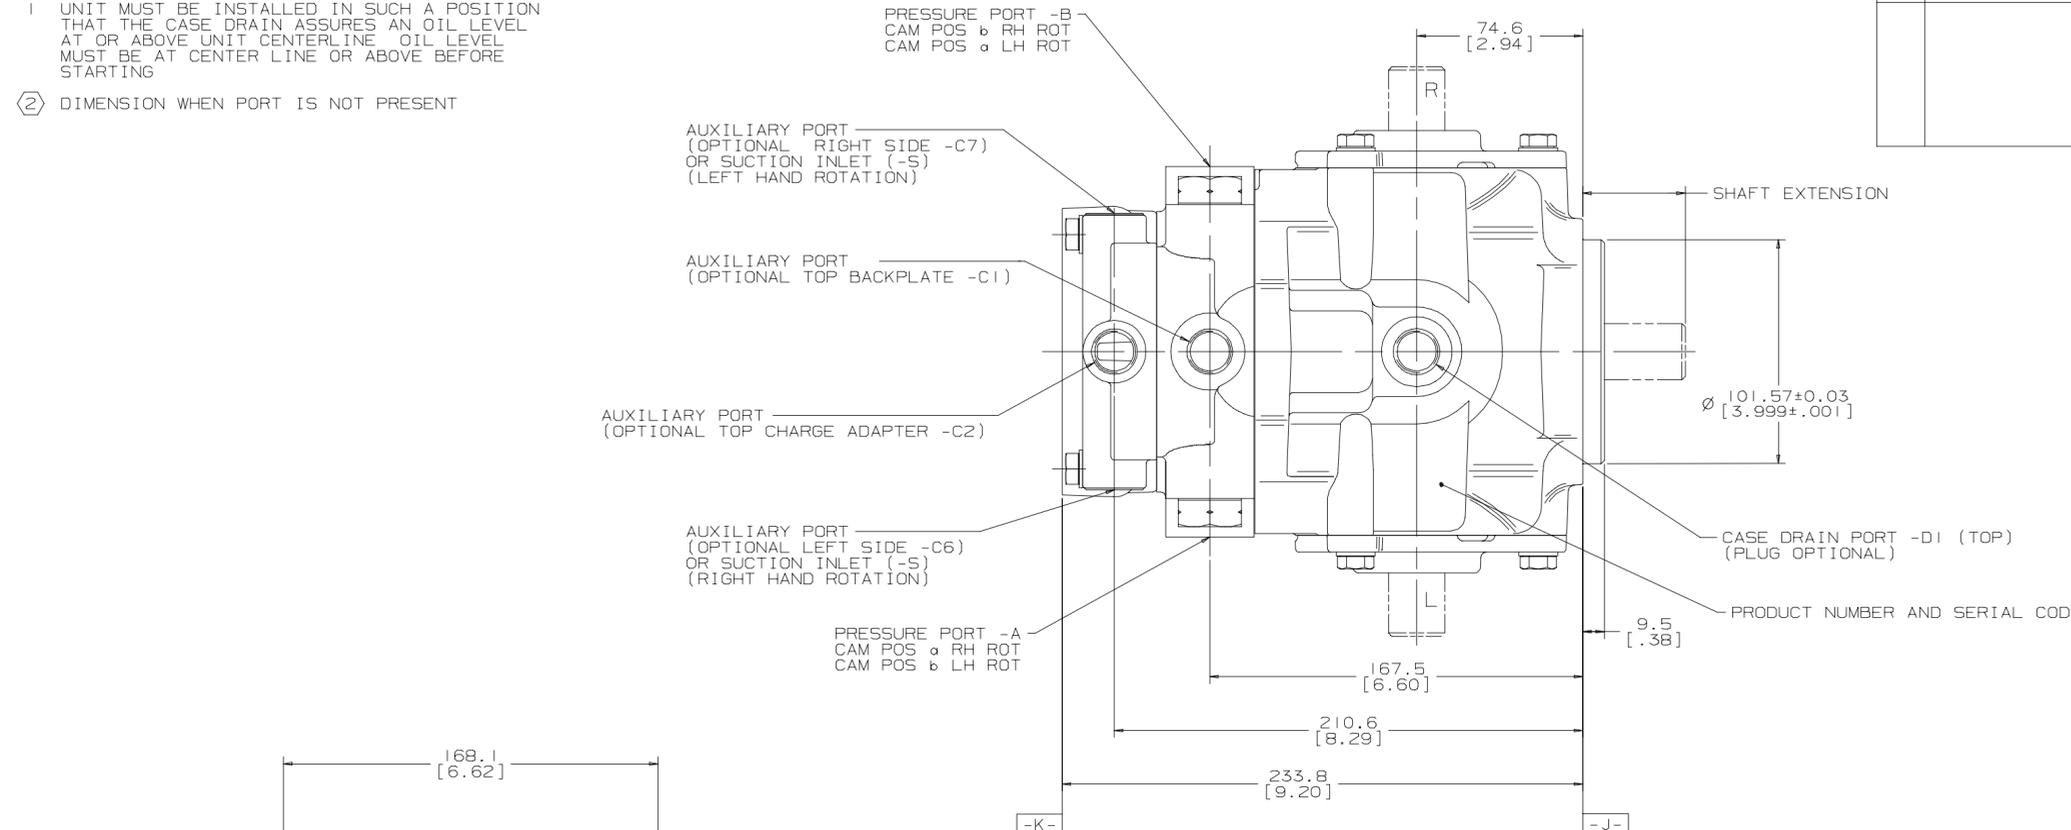

GROOVE TO ACCEPT AN AS568A SIZE O42 (1/16 X 3 1/4 ID) O-RING

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/>		DRAWING BASED ON ANSI Y14.5M-1982	
TOLERANCES .X ---- .XX ---- .XXX ---- < ----		THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN. (PER ISO 16016)	
UNSPECIFIED DRAFT ANGLES ARE <input checked="" type="checkbox"/> THIRD ANGLE PROJECTION		DRAWN BY/DATE JMS 2-21-97	
UNSPECIFIED RADIUS ARE <input checked="" type="checkbox"/> METALLURGY ---- BY/DATE		CHECKED BY/DATE CEW 3-10-97	
DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>		ENGR BY/DATE CEW 3-12-97	
DO NOT SCALE		TITLE PISTON PUMP INSTALLATION	
ARITHMETICAL AVERAGE		MATERIAL/HEAT TREAT	
SCALE 1/1		NUMBER A-1169-014	
SHEET 1 OF 1			

