


PART NUMBER	I.D. (REF) mm [in]	O.D. (MAX) mm [in]	OPERATING PRESSURE bar [psi]	MIN. BURST PRESSURE bar [psi]	MIN. BEND RADIUS mm [in]	WEIGHT kg/m [lbs/ft]
B-4	4.8 [.19]	8.6 [.34]	86 [1250]	344 [5000]	38.1 [1.50]	0.12 [.08]
B-5	6.4 [.25]	10.2 [.40]	77 [1125]	310 [4500]	50.8 [2.00]	0.13 [.09]
B-6	7.9 [.31]	11.7 [.46]	72 [1050]	289 [4200]	88.9 [3.50]	0.18 [.12]
B-8	10.4 [.41]	14.7 [.58]	68 [1000]	275 [4000]	114.3 [4.50]	0.25 [.17]
B-10	12.7 [.50]	17.3 [.68]	62 [900]	248 [3600]	127 [5.00]	0.31 [.21]
B-12	15.7 [.62]	20.3 [.80]	51 [750]	206 [3000]	152.4 [6.00]	0.40 [.27]
B-16	22.4 [.88]	27.2 [1.07]	43 [625]	172 [2500]	228.6 [9.00]	0.63 [.43]

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	1) NOTE #4 TEMPERATURE WAS -54°C TO +230°C [-65°F TO +450°F]	2003-12-09	EN-F25540 DP-1511 DS/W.R.H.

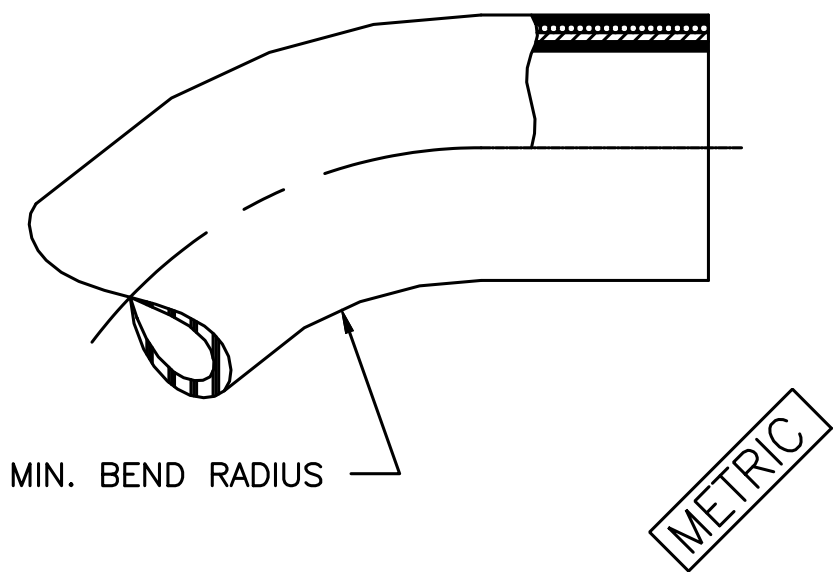

5. ALL HOSE ATTRIBUTES ARE METRIC [ENGLISH].
4. TEMPERATURE RANGE -54°C TO +204°C [-65°F TO +400°F]. A  
1
3. IDENTIFICATION: (a) ONE BRONZE BRAID.  
(b) WHITE TUBE STOCK
2. APPLICATION: IDEAL FOR STEAM, COMPRESSOR DISCHARGE AND VIRTUALLY ALL CHEMICAL APPLICATIONS.  
NOT RECOMMENDED FOR STEAM-COLD WATER CYCLING.
1. CONSTRUCTION: EXTRUDED PTFE INNER TUBE WITH FULL COVERAGE OF A SINGLE BRONZE BRAID.

DRAWN D.Snyder		<b>EATON</b> HYDRAULICS OPERATIONS TECHNICAL CENTER MAUMEE, OHIO, U.S.A.	
CHECKED W.R.HYDE			
APPROVED W.R.HYDE		DRAWING TITLE	
RELEASE DATE 2003-05-16		EVERFLEX HOSE SMOOTH BORE "B" SERIES BRONZE WIRE BRAID	
EN-F25540 DP-1511			
THIRD ANGLE PROJECTION	SIZE A3	DRAWING NUMBER B	REV A
SCALE NONE		DIST U	CAGE CODE 01276
		SHEET 1 OF 2	

NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION  
Eaton Corporation claims proprietary rights in the information disclosed hereon. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown hereon without the written permission of the Eaton Corporation.